

## Bottom Mounting Rail RMG-B

Rails with holes threaded from the bottom and induction hardened raceways.

Very high load capacity, stiffness and precision.

Dimensions in mm. (According to the DIN 645/I standards.)

**Max. Operating Speed (m/s):** 3

**Max. Acceleration (m/s<sup>2</sup>):** 50

**Temperature range (°C):** -10 °C to +80

**Length (mm):** Up to 4000 mm


**Material:** Hardened steel



## General Data

Designation	Weight (kg/m)
RMG55-B	15.2
RMG25-B	3.4
RMG65-B	22.5
RMG35-B	6.5
RMG45-B	10.7

## Dimensions

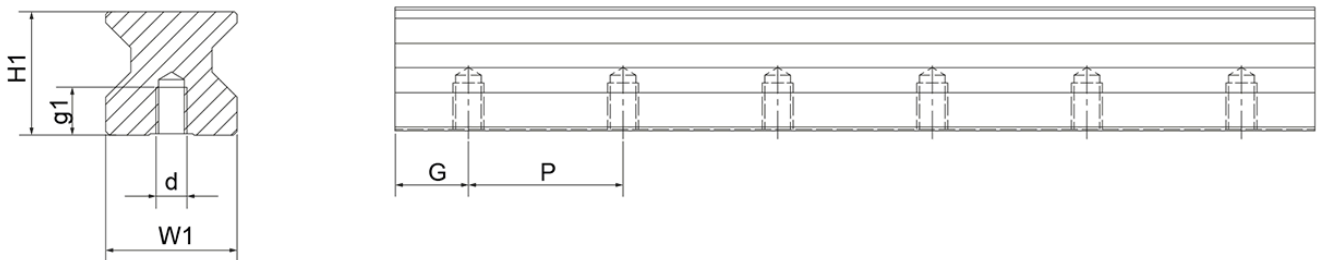

Designation	H1	W1	d x g1	Hole Pitch (P)
RMG55-B	47.8	53	M14 x 22	60
RMG25-B	24.35	23	M6 x 12	30
RMG65-B	55	63	M16 x 25	75
RMG35-B	32	34	M8 x 15	40
RMG45-B	39.85	45	M12 x 19	52.5