WV

Dimensions in mm.

Other types available on request.

Material: Quenched and tempered steel Cf53 / 1.1213 / C53G
Surface hardness: 59 HRC min. Hardening depth according to DIN ISO 18203.
Coating: Chrome layer, thickness ca. 10 µm. Layer hardness ≥ 800 HV.
Standard Tolerance: ISO h7




Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

Designation	Weight (kg/m)
WV10	0.62
WV12	0.89
WV16	1.58
WV20	2.47
WV25	3.85
WV30	5.55
WV40	9.86

Dimensions

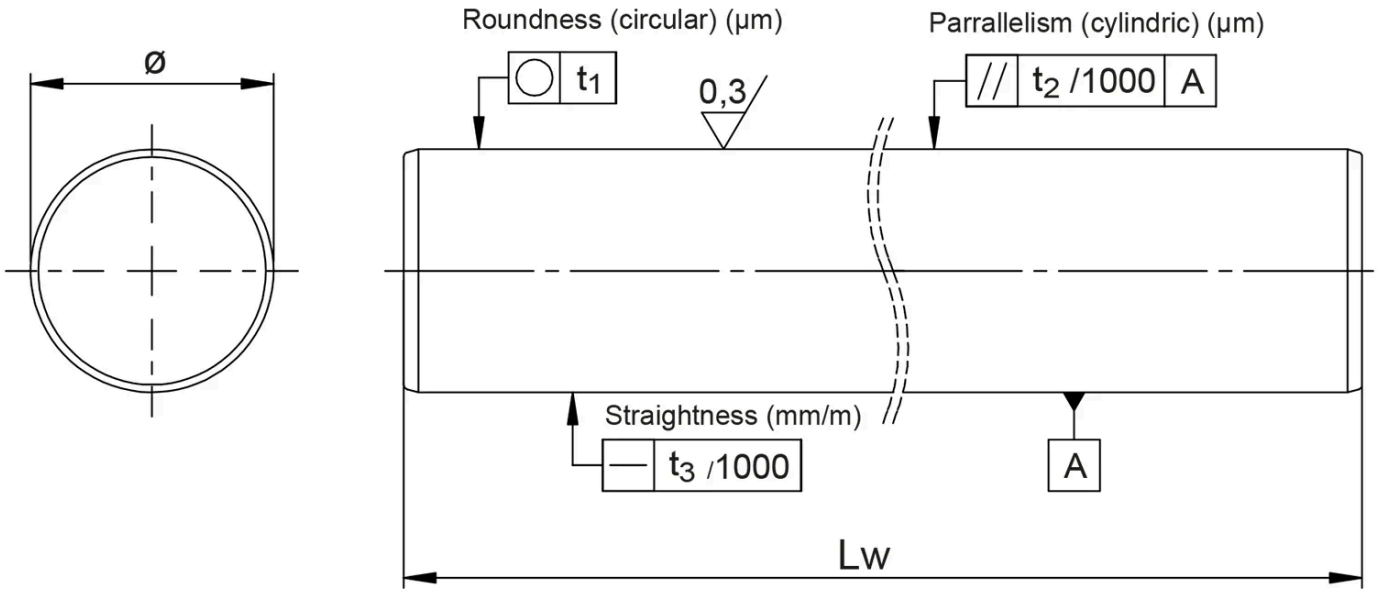

Designation	Lw (mm)	Diameter	Hardening Depth (mm)	Roundness t1 (µm)	Parallelism t2 (µm)	Straightness t3 (mm/m)
WV10	6000	10	0.4	6	9	0.3
WV12	6000	12	0.6	8	11	0.3
WV16	6000	16	0.6	8	11	0.2
WV20	6000	20	0.9	9	13	0.2
WV25	6000	25	0.9	9	13	0.2
WV30	6000	30	0.9	9	13	0.2
WV40	6000	40	1.5	11	16	0.2

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.