

## WV

Dimensions in mm.

Other types available on request.

**Material:** Quenched and tempered steel Cf53 / 1.1213 / C53G

**Surface hardness:** 59 HRC min. Hardening depth according to DIN ISO 18203.

**Coating:** Chrome layer, thickness ca. 10 µm. Layer hardness  $\geq$  800 HV.


**Standard Tolerance:** ISO h7



## General Data

Designation	Weight (kg/m)
WV10	0.62
WV12	0.89
WV16	1.58
WV20	2.47
WV25	3.85
WV30	5.55
WV40	9.86

## Dimensions

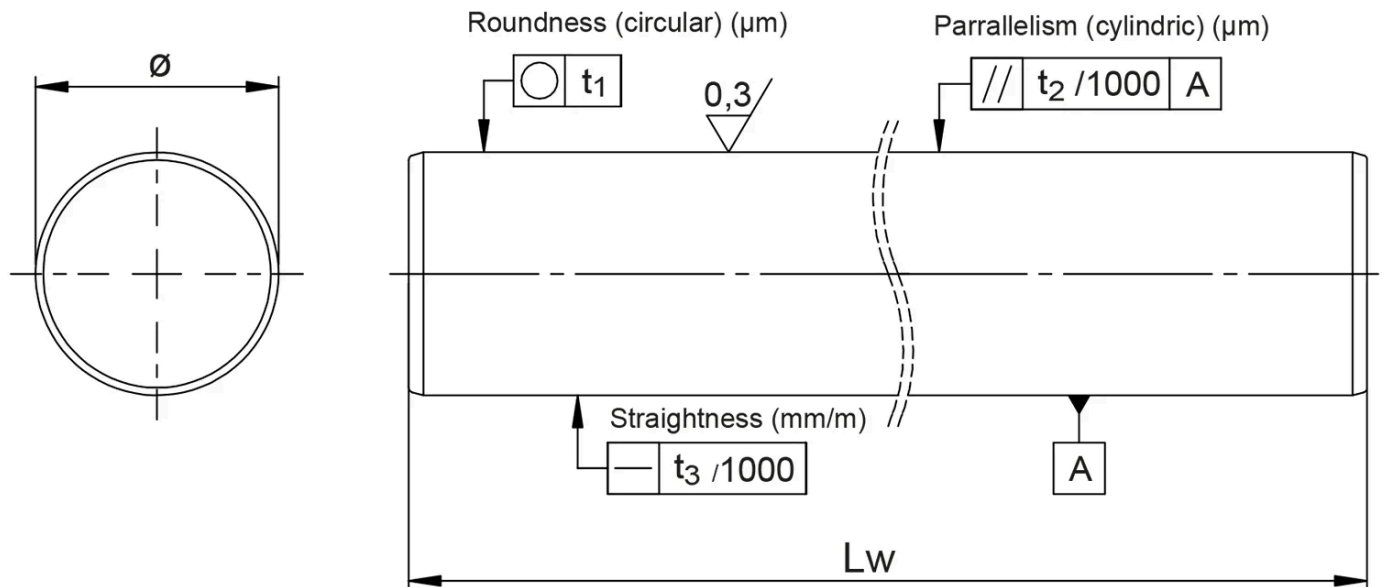

Designation	Lw (mm)	Diameter	Hardening Depth (mm)	Roundness t1 ( $\mu$ m)	Parallelism t2 ( $\mu$ m)	Straightness t3 (mm/m)
WV10	6000	10	0.4	6	9	0.3
WV12	6000	12	0.6	8	11	0.3
WV16	6000	16	0.6	8	11	0.2
WV20	6000	20	0.9	9	13	0.2
WV25	6000	25	0.9	9	13	0.2
WV30	6000	30	0.9	9	13	0.2
WV40	6000	40	1.5	11	16	0.2