FTSN

Aluminium with mounting holes.

Standard section length L = 3700 mm. Lengths other than standard (Lmax = 3700 mm) are also available on request.

Support rails can be supplied upon request, with or without mounting holes. No anodizing in holes.

Dimensions in mm.


Note: The shaft is not included, please order separately.

Material: Aluminium



Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Dimensions

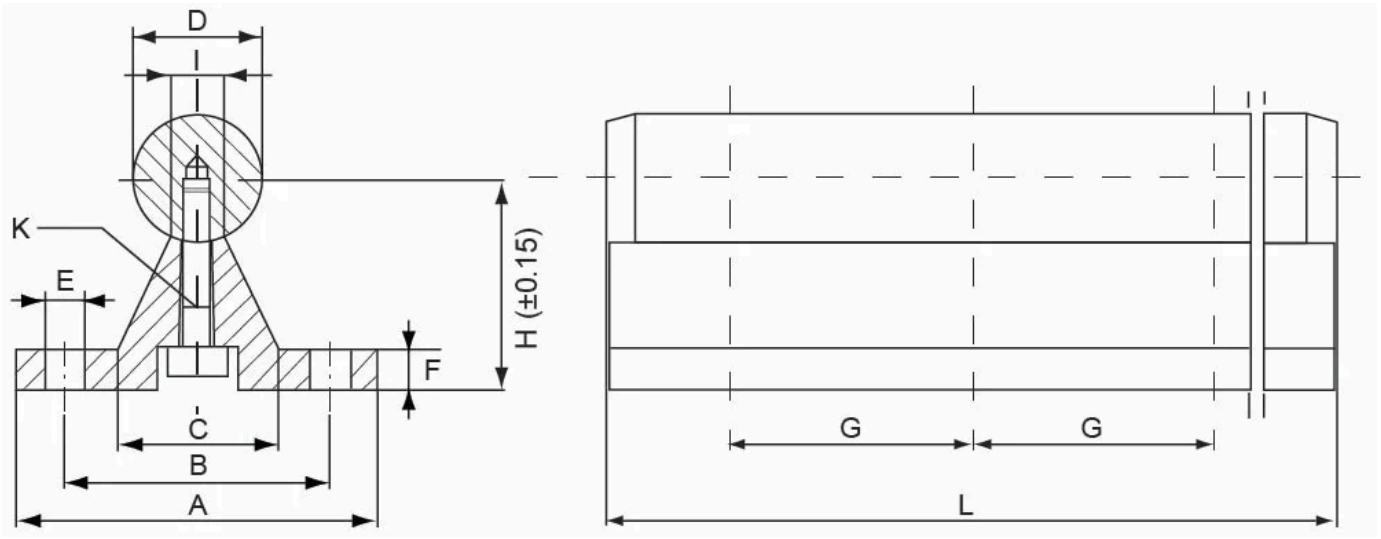

Designation	Remark	G	A	B	H	D	K	F	C
FTSN12G	Standard section length L = 4250 mm	75	40	29	22	12	M4x20	5	15
FTSN16G	Standard section length L = 4250 mm	100	45	33	26	16	M5x20	5	19
FTSN20G	Standard section length L = 4250 mm	100	52	37	32	20	M6x25	6	23
FTSN25G	Standard section length L = 4250 mm	120	57	42	36	25	M8x30	6	26
FTSN30G	Standard section length L = 4250 mm	150	69	51	42	30	M10x35	7	29
FTSN40G	Standard section length L = 4250 mm	200	73	55	50	40	M10x40	8	36

Designation	E	I
FTSN12G	4.5	5.4
FTSN16G	5.5	7
FTSN20G	6.6	8.1
FTSN25G	6.6	10.3
FTSN30G	9	11
FTSN40G	9	15

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.