

## XTR---.0300

- Combined – adjustable with insert washer
- Extra sustainable
- Extra exact
- Extra strong
- Extra long-lasting
- Adjustment of dimension A by using a shim

Use profile XUP---.0700

Fixing square element BQ---.1000

Rectangular fixing element BR---.1100

Note! System Load Capacity refers to capacity of both rail and bearing. Dynamic Load Capacity refers to bearing.

Dimensions in mm.

**Roller Type:** Heavy

**Sizes Available:** 60; 70; 80; 90; 110; 120; 150




## General Data

FA = System Load Capacity Axial  
 FR = System Load Capacity Radial  
 Ca = Dynamic Load Capacity Axial  
 C = Dynamic Load Capacity Radial



| Designation        | System Load Capacity Radial (N) | System Load Capacity Axial (N) | Dynamic Load Capacity Axial (N) | Dynamic Load Capacity Radial (N) | Profile     |
|--------------------|---------------------------------|--------------------------------|---------------------------------|----------------------------------|-------------|
| <b>XTR060.0300</b> | 15390                           | 3800                           | 8000                            | 31000                            | XUP---.0700 |
| <b>XTR070.0300</b> | 16430                           | 4100                           | 13000                           | 45500                            | XUP---.0700 |
| <b>XTR080.0300</b> | 18210                           | 6500                           | 14000                           | 48000                            | XUP---.0700 |
| <b>XTR090.0300</b> | 31680                           | 6600                           | 15000                           | 68000                            | XUP---.0700 |
| <b>XTR110.0300</b> | 34850                           | 11500                          | 31000                           | 81000                            | XUP---.0700 |
| <b>XTR120.0300</b> | 47430                           | 12700                          | 31000                           | 110000                           | XUP---.0700 |
| <b>XTR150.0300</b> | 82190                           | 22600                          | 68000                           | 151000                           | XUP---.0700 |

## Dimensions

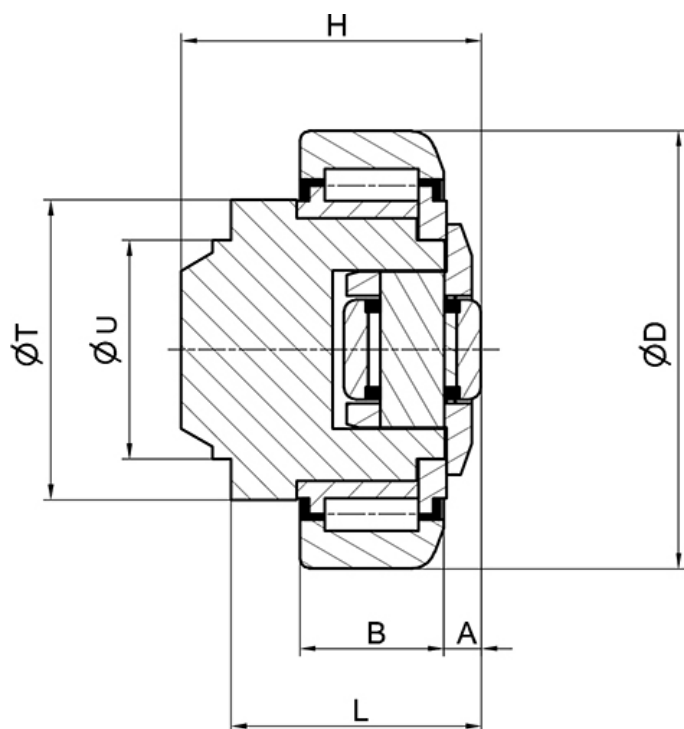

| Designation        | A   | B  | D     | H    | L    | T   | U  |
|--------------------|-----|----|-------|------|------|-----|----|
| <b>XTR060.0300</b> | 5.5 | 20 | 65.5  | 43   | 33   | 42  | 30 |
| <b>XTR070.0300</b> | 6.5 | 23 | 73.8  | 48   | 40   | 48  | 35 |
| <b>XTR080.0300</b> | 7   | 23 | 81.7  | 50.5 | 39.5 | 54  | 40 |
| <b>XTR090.0300</b> | 7   | 30 | 92.4  | 61   | 48   | 59  | 45 |
| <b>XTR110.0300</b> | 8   | 31 | 111.4 | 69   | 55   | 71  | 60 |
| <b>XTR120.0300</b> | 8   | 37 | 126.8 | 75.8 | 59.5 | 80  | 60 |
| <b>XTR150.0300</b> | 15  | 45 | 153.1 | 89   | 69   | 103 | 60 |