



Dimensions in mm.

Other types available on request.

**Material:** Quenched and tempered steel Cf53 / 1.1213 / C53G

**Surface hardness:** 59 HRC min. Hardening depth according to DIN ISO 18203.

**Coating:** Chrome layer, thickness ca. 10 µm. Layer hardness ≥ 800 HV.


**Standard Tolerance:** ISO h7



## General Data

| Designation | Weight (kg/m) |
|-------------|---------------|
| WV10        | 0.62          |
| WV12        | 0.89          |
| WV16        | 1.58          |
| WV20        | 2.47          |
| WV25        | 3.85          |
| WV30        | 5.55          |
| WV40        | 9.86          |

## Dimensions

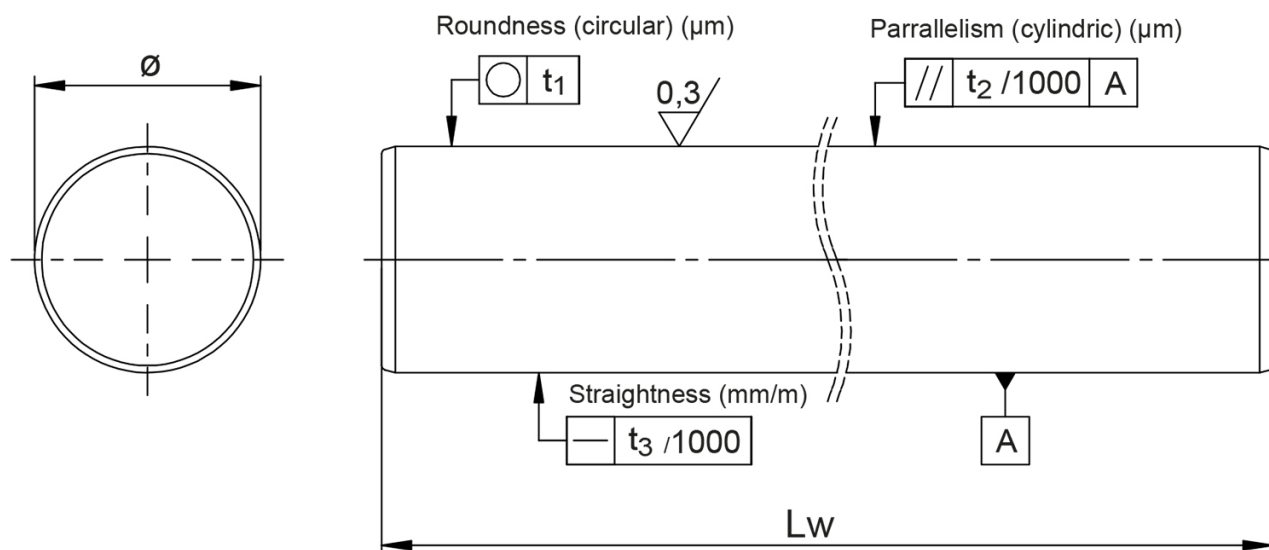

| Designation | Lw (mm) | Diameter | Hardening Depth | Roundness t1 | Parallelism t2 | Straightness t3 |
|-------------|---------|----------|-----------------|--------------|----------------|-----------------|
| WV10        | 6000    | 10       | .4              | 6            | 9              | .3              |
| WV12        | 6000    | 12       | .6              | 8            | 11             | .3              |
| WV16        | 6000    | 16       | .6              | 8            | 11             | .2              |
| WV20        | 6000    | 20       | .9              | 9            | 13             | .2              |
| WV25        | 6000    | 25       | .9              | 9            | 13             | .2              |
| WV30        | 6000    | 30       | .9              | 9            | 13             | .2              |
| WV40        | 6000    | 40       | 1.5             | 11           | 16             | .2              |